User — 10

Internet — 12

First web site — 14

Internet — 12

Second web Site — 16

Fig. 1

FiPass Authentication (login)

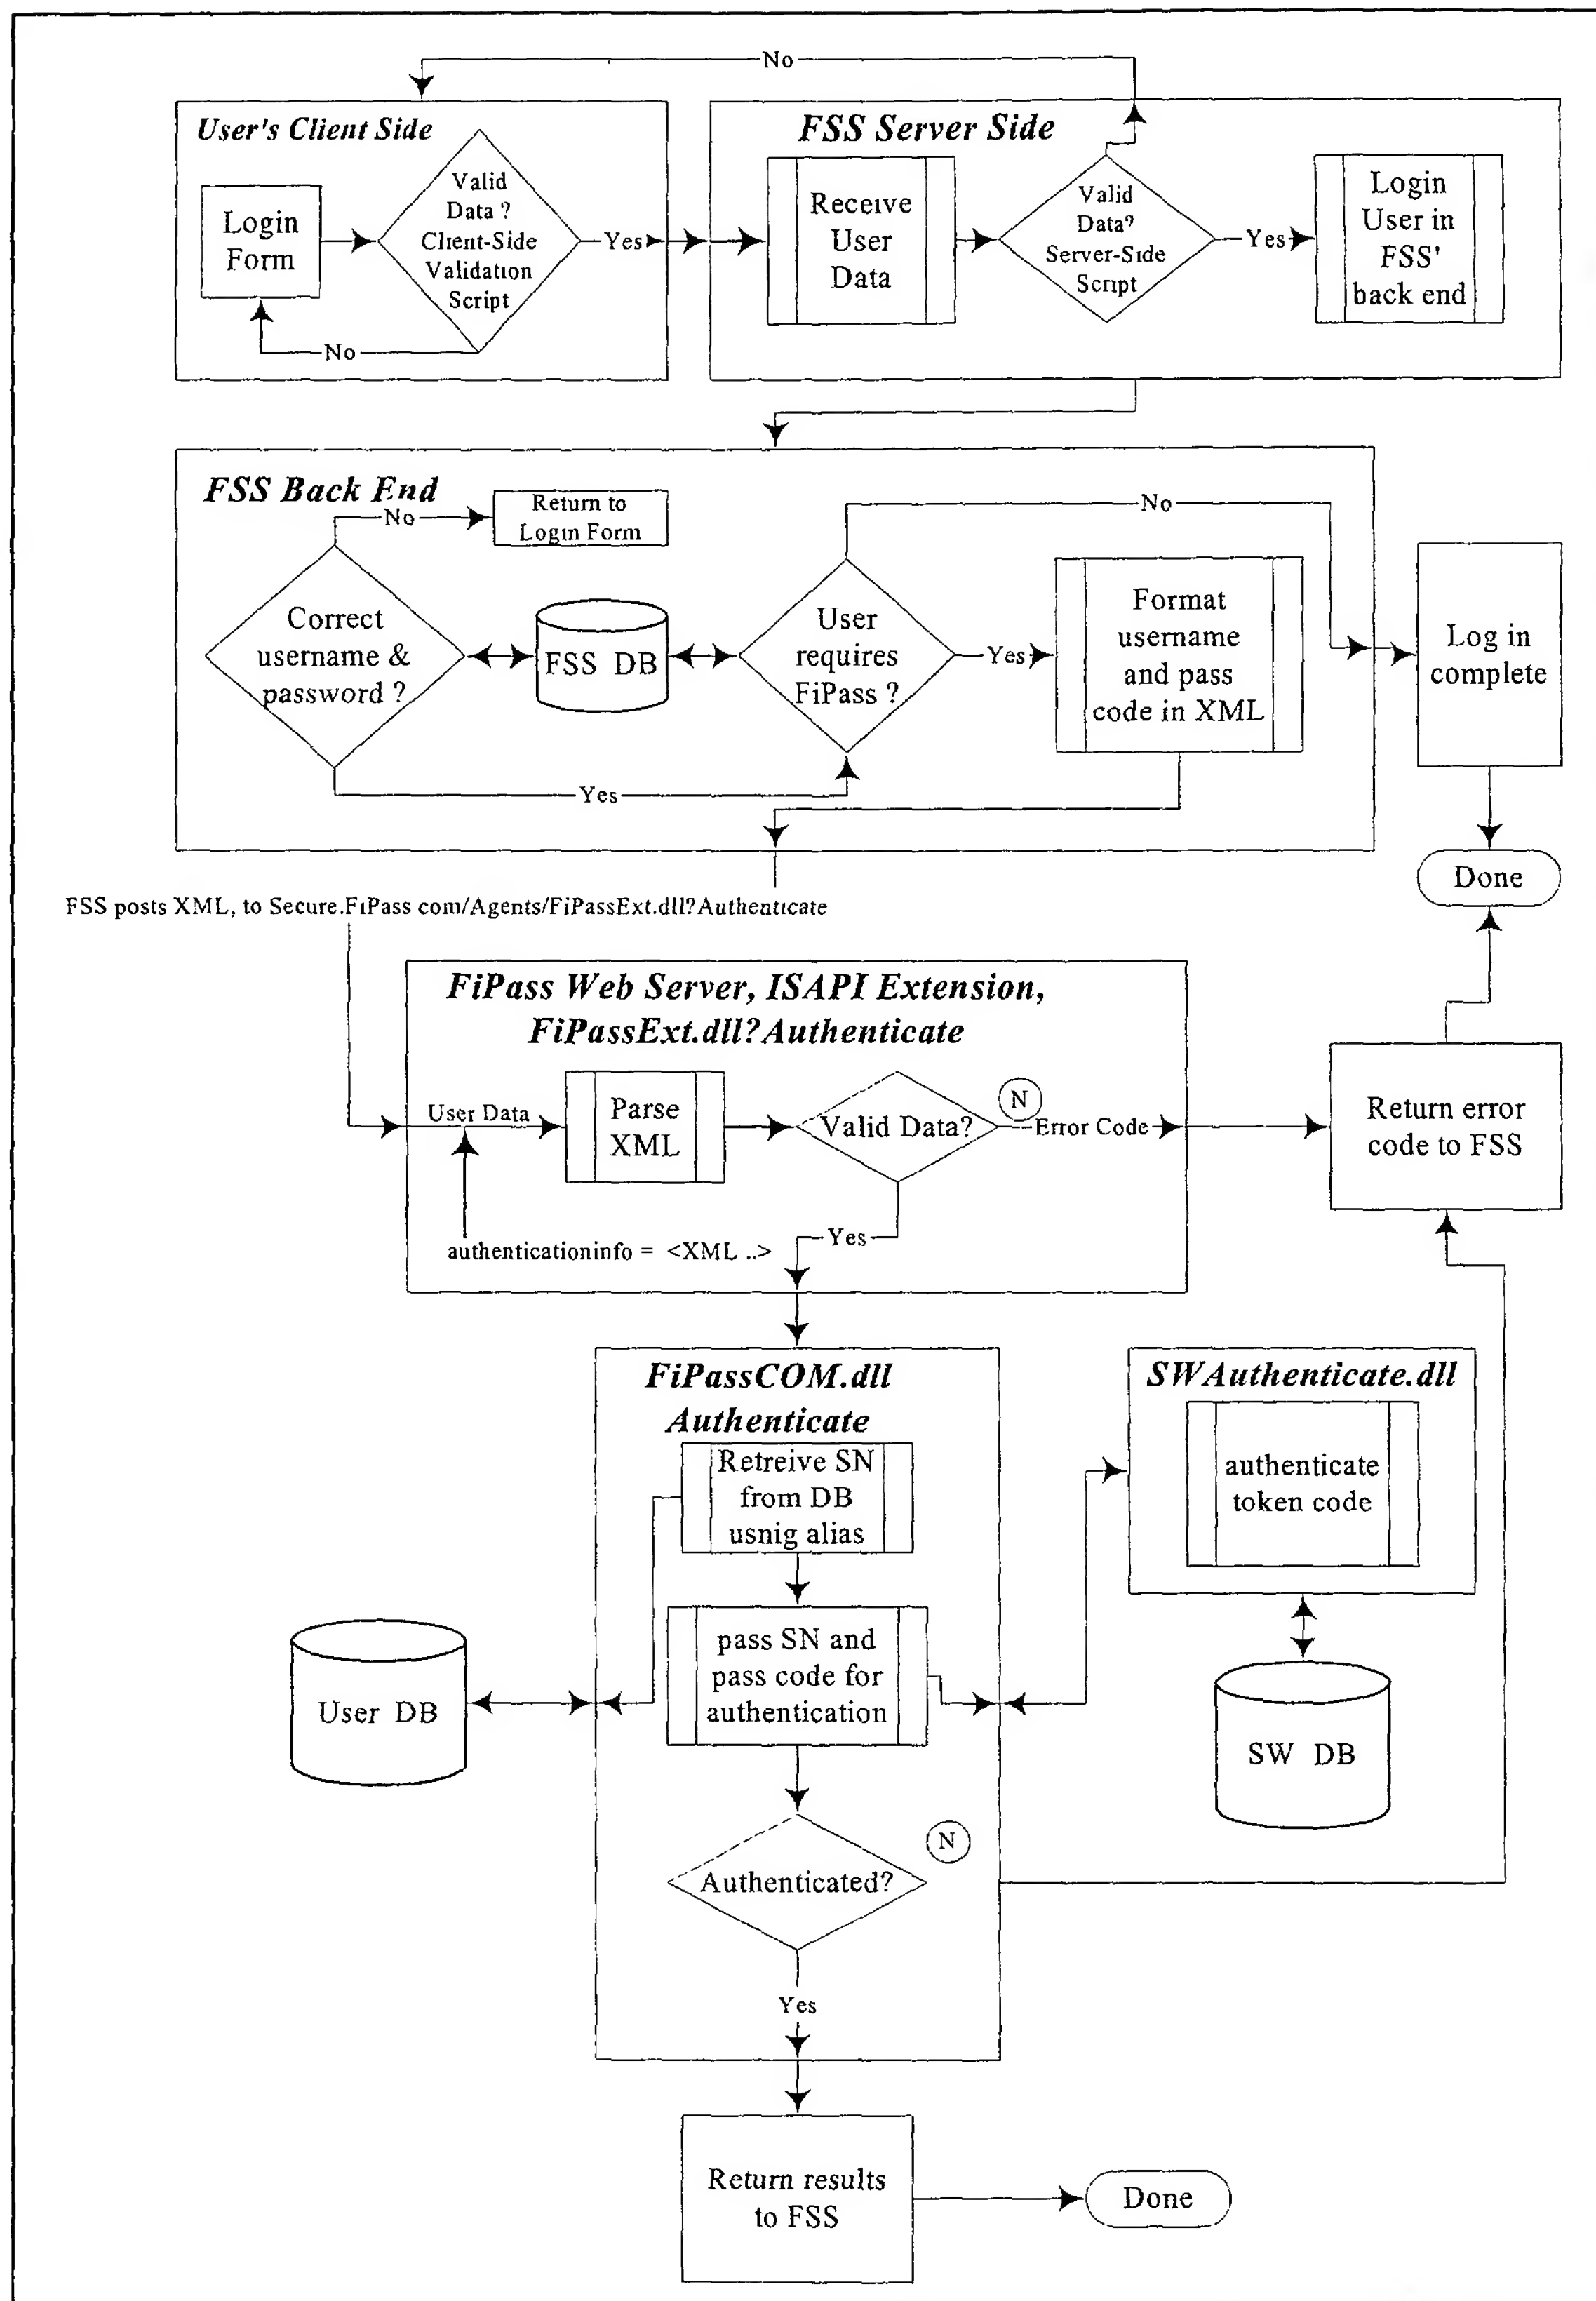Figure 2   Login Process

User's Client Side

Login Form → Valid Data ? Client-Side Validation Script

Valid Data ? Client-Side Validation Script → No → Login Form

Valid Data ? Client-Side Validation Script → Yes

FSS Server Side

Receive User Data → Valid Data? Server-Side Script

Valid Data? Server-Side Script → Yes → Login User in FSS' back end

No (top loop back)

FSS Back End

Correct username & password ? → No → Return to Login Form

Correct username & password ? ↔ FSS DB ↔ User requires FiPass ?

User requires FiPass ? → Yes → Format username and pass code in XML

User requires FiPass ? → No

Format username and pass code in XML → Log in complete

Correct username & password ? → Yes

Log in complete → Done

FSS posts XML, to Secure.FiPass com/Agents/FiPassExt.dll?Authenticate

FiPass Web Server, ISAPI Extension, FiPassExt.dll?Authenticate

User Data → Parse XML → Valid Data? (N)

Valid Data? → Error Code → Return error code to FSS

Valid Data? → Yes

authenticationinfo = <XML ..>

Return error code to FSS → Done

FiPassCOM.dll Authenticate

Retreive SN from DB usnig alias → pass SN and pass code for authentication

User DB ↔ pass SN and pass code for authentication

pass SN and pass code for authentication → Authenticated? (N)

SWAuthenticate.dll

authenticate token code

SW DB

Authenticated? → Yes → Return results to FSS → Done

Authenticated? (N) → Return error code to FSS

Figure 3   Authentication Process

{H:\PA\CORP\16375\00025\A0520945 DOC}

```
┌─────────────────────────────────────────────────────────────────────────────────┐
│                                                                                   │
│  ╱──────────┐      ╱──────────╲                                                   │
│ │User enters│     │   User     │      ╱‾‾‾‾‾‾‾‾‾‾╲      ╱‾‾‾‾‾‾‾‾‾‾‾╲             │
│ │1. username│ ──▶ │  clicks     │ ──▶ │ on_Submit() │ ──▶│ Loop thru each │◀──┐  │
│ │2. password│     │  submit     │     │  executes   │    │ field on form  │   │  │
│ │3. pass code│     ╲──────────╱      ╲‾‾‾‾‾‾‾‾‾‾╱      ╲‾‾‾‾‾‾‾‾‾‾‾╱        │  │
│  └──────────┘                                                  │             │  │
│       ▲                                                        ▼             │  │
│       │         ┌──────────────┐        ┌─────────────────────────────┐     │  │
│       │         │Return error to│       │              if              │     │  │
│       └─────────│  user, focus  │       │  checkFieldBlank(pField)     │     │  │
│                 │ cursor on field│◀──────│          is TRUE            │     │  │
│                 └──────────────┘  TRUE  │ exit function, return error  │     │  │
│                        ▲                 └─────────────────────────────┘     │  │
│                        │                              │ False                │  │
│                        │                              ▼                      │  │
│                        │                 ┌─────────────────────────────┐     │  │
│                  TRUE  │                 │              if              │     │  │
│                        │◀────────────────│  checkInvalidChar(pField)    │     │  │
│                        │      TRUE       │          is TRUE            │     │  │
│                        │                 │ exit function, return error  │     │  │
│                        │                 └─────────────────────────────┘     │  │
│                        │                              │ False                │  │
│                  TRUE  │                              ▼                      │  │
│                        │         ┌──────────────────────┐    ╱‾‾‾‾‾‾‾‾╲      │  │
│  ╱‾‾‾‾‾‾‾‾‾‾╲  False   │         │         if           │   ╱  Last     ╲     │  │
│ │  Form      │◀────────│─────────│  invalidTokenCode1() │◀──│   Field ?   │    │  │
│ │ Submitted  │         │         │       is TRUE        │Yes ╲          ╱     │  │
│  ╲‾‾‾‾‾‾‾‾‾‾╱         │         │ exit function, return error│ ╲_____╱      │  │
│                                 └──────────────────────┘        │ No         │  │
│                                                                  ▼            │  │
│                                                        ┌──────────────┐       │  │
│                                                        │Next form field│──────┘  │
│                                                        └──────────────┘          │
└─────────────────────────────────────────────────────────────────────────────────┘
```

Figure 4   Client Side Authentication

Figure 5   Server Side Authentication

Request received from FSS

Secure.FiPass.com/Agents/FiPassExt?
Authenticate?AuthenticationInfo=<XML...>

Secure.FiPass.com

IIS 5.0

Authenticate
AuthenticationInfo= <XML...>

FiPassExt.dll

1

Authenticate

2

3

6

5

4

Declare working variables

Assume valid data, set return code

Parse XML

Validate XML

Authenticate User

Return result code to IIS 5.0

Get AuthenticationInfo

Load XML

Loop thru each field in XML

Authentication

ResultCode

Secure.FiPass.

IIS 5.0

DomDocument3

If length = 0, set error code

FiPassCOM

MSXML

Return error code

Authenticate

LoadXML

Next field

FSS receive response

Figure 6   Authentication ISAPI Extension

Figure 7   Authentication COM Functionality

The diagram contains the following text elements:

- **FiPassCOM.Authentication**
- **Authenticate(pXML as String)**
- 1
- 2
- 3
- 4
- 5
- 6
- Parse XML
- Validate XML
- Encrypt username
- Load & execute SP_GetLoginByAlias
- Call Authentication object
- Return result code to ISAPI
- Load XML
- Loop thru each field in XML
- ASPEncrypt
- ASPEncrypt
- Set Command
- MSADO
- SWAuthen
- SWAuthentication
- DomDocument3
- If length = 0, set error code
- EncryptBuffer
- Execute
- Authenticate
- MSXML
- Return error code
- Return results 1 Status 2. LoginSN
- User authenticated ?
- LoadXML
- Next field
- No
- Yes
- Set error code
- Return error & exit
- goto 6

SWAuthentication.SWAuthen
Authenticate(BSTR username, BSTR tokencode) **Returns result code (as BSTR)**

Initialize library	Create the configuration	Register the extension	Open the connection	Authenticate the request	Return result code
swecInit()	swecCreate Config	swecRegister Ex1	swecOpen	swecAuthen	authenRec. resultcode

Figure 8   SWAuthenticate.dll